



HYPersonic STATIC STABILITY INVESTIGATION OF A TOMAHAWK 20-PERCENT-SCALE MODEL

Glenn H. Merz

ARO, Inc.

August 1966

Distribution of this document is unlimited.

RECEIVED
AUG 10 1966
AEDC-TR-66-148

**VON KÁRMÁN GAS DYNAMICS FACILITY
ARNOLD ENGINEERING DEVELOPMENT CENTER
AIR FORCE SYSTEMS COMMAND
ARNOLD AIR FORCE STATION, TENNESSEE**

NOTICES

When U. S. Government drawings specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, or in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Qualified users may obtain copies of this report from the Defense Documentation Center.

References to named commercial products in this report are not to be considered in any sense as an endorsement of the product by the United States Air Force or the Government.

HYPersonic STATIC STABILITY INVESTIGATION OF A
TOMAHAWK 20-PERCENT-SCALE MODEL

Glenn H. Merz
ARO, Inc.

Distribution of this document is unlimited.

FOREWORD

The work reported herein was done at the request of NASA, Goddard Space Flight Center, for Fairchild-Hiller Corporation under System 921E.

The results of tests presented were obtained by ARO, Inc. (a subsidiary of Sverdrup & Parcel and Associates, Inc.), contract operator of the Arnold Engineering Development Center (AEDC), Air Force Systems Command (AFSC), Arnold Air Force Station, Tennessee, under Contract AF40(600)-1200. The test was conducted from May 27 to June 2, 1966, under ARO Project No. VB1686, and the manuscript was submitted for publication on July 14, 1966.

The author wishes to thank L. L. Trimmer, ARO, Inc., for his technical assistance during these tests.

This technical report has been reviewed and is approved.

Donald E. Beitsch
Major, USAF
AF Representative, VKF
Directorate of Test

Leonard T. Glaser
Colonel, USAF
Director of Test

ABSTRACT

An experimental investigation was conducted to obtain detailed static stability, induced roll and yaw, and roll forcing information on several configurations of a Tomahawk 20-percent-scale model. Tests were conducted at nominal Mach numbers of 6 and 8, free-stream Reynolds numbers of 2.5×10^6 and 5.0×10^6 per foot, angles of attack from -2 to 14 deg, and roll angles from 0 to 90 deg. Selected results are presented to illustrate types and quality of data obtained.

CONTENTS

	<u>Page</u>
ABSTRACT	iii
NOMENCLATURE	vi
I. INTRODUCTION	1
II. APPARATUS	
2.1 Models	1
2.2 Wind Tunnel	1
2.3 Instrumentation	2
III. TEST CONDITIONS	2
IV. RESULTS AND DISCUSSION	2

ILLUSTRATIONS

Figure

1. Model Photograph	5
2. Model Details	6
3. Tunnel B	7
4. Effect of Model Length on Longitudinal Stability Characteristics at Mach 6, Zero Roll, $Re_{\infty}/ft = 2.5 \times 10^6$	8
5. Effect of Mach Number on Longitudinal Stability Characteristics of Configuration $N_1E_2B_1F_1$, Zero Roll, $Re_{\infty}/ft = 2.5 \times 10^6$	9
6. Effect of Roll Angle on Lateral Stability Characteristics of Configurations $N_1E_2B_1F_1$ and $N_1E_2B_1F_2$ at Mach 6, $Re_{\infty}/ft = 2.5 \times 10^6$	10
7. Effect of Angle of Attack on Lateral Stability Characteristics of Configurations $N_1E_2B_1F_1$ and $N_1E_2B_1F_2$ at Mach 6, $Re_{\infty}/ft = 2.5 \times 10^6$	11

TABLE

I. Test Summary	12
---------------------------	----

NOMENCLATURE

C_ℓ	Rolling-moment coefficient, rolling moment/ $q_\infty Sd$
C_m	Pitching-moment coefficient, pitching moment*/ $q_\infty Sd$
C_N	Normal-force coefficient, normal force*/ $q_\infty S$
C_n	Yawing-moment coefficient, yawing moment*/ $q_\infty Sd$
C_Y	Side-force coefficient, side force*/ $q_\infty S$
ΔC_ℓ	Differential rolling-moment coefficient, $C_{\ell_\alpha} - C_{\ell_{\alpha=0}}$
ΔC_n	Differential yawing-moment coefficient, $C_{n_\alpha} - C_{n_{\alpha=0}}$
ΔC_Y	Differential side-force coefficient, $C_{Y_\alpha} - C_{Y_{\alpha=0}}$
d	Model centerbody diameter, 1.80 in.
M_∞	Free-stream Mach number
P_0	Tunnel stagnation pressure, psia
q_∞	Free-stream dynamic pressure, psia
Re_∞	Free-stream Reynolds number, ft^{-1}
S	Model centerbody cross-sectional area, 2.545 in. ²
T_0	Tunnel stagnation temperature, °R
X_{cp}	Center of pressure, $10.539 + C_m/C_N$, diameter from base
α	Angle of attack, deg
ϕ	Roll angle, deg

*Measured in ballistic axis

SECTION I INTRODUCTION

The purpose of these tests was to obtain detailed static stability, induced roll and yaw, and roll forcing information on a Tomahawk rocket vehicle 20-percent-scale model at Mach 6 and 8. Model center-body extensions were used to obtain configurations of three different lengths. The medium length model was tested with three nose and three fin configurations. Induced roll and yaw tests were conducted only at Mach 6.

Tests were conducted in the von Kármán Gas Dynamics Facility (VKF) 50-in. hypersonic tunnel (Gas Dynamic Wind Tunnel, Hypersonic (B)) at Mach numbers of 6 and 8, free-stream unit Reynolds numbers of 2.5×10^6 and 5.0×10^6 , angles of attack from -2 to 14 deg, and roll angles from 0 to 90 deg.

SECTION II APPARATUS

2.1 MODELS

Model photographs and details are shown in Figs. 1 and 2. The various configurations consisted of three nose sections, two ogive and one conical; three centerbody extensions; and three sets of flaps, two without cant and one with a 1-deg positive cant.

2.2 WIND TUNNEL

Tunnel B is a 50-in. -diam continuous flow, closed-circuit, variable density wind tunnel equipped with interchangeable Mach 6 and 8 axisymmetric, contoured nozzles. It operates at nominal Mach numbers of 6 and 8 at stagnation pressures from 20 to 280 psia and from 50 to 900 psia, respectively, at temperatures up to 1350°R.

Figure 3 shows the tunnel and its associated equipment. As shown in this figure, the model may be injected into the tunnel for a test run and then retracted from the test section for model changes without interrupting tunnel airflow.

2.3 INSTRUMENTATION

A six-component, moment-type, strain-gage balance was used to measure model forces and moments. Prior to testing, a static calibration was performed using combined loads of the magnitude anticipated during this test. The expected deviations, based on this calibration, are summarized below:

Component	Deviation
Normal Force	± 0.15 lb
Pitching Moment	± 0.50 in. -lb
Side Force	± 0.05 lb
Yawing Moment	± 0.15 in. -lb
Rolling Moment	± 0.05 in. -lb

The data presented in Section IV were obtained by rolling the model on the balance to obtain ballistic axes data directly; thus, the above-mentioned deviations apply directly to the data.

SECTION III TEST CONDITIONS

Conditions used during the tests are summarized as follows:

Configuration	M_∞	P_{O_2} , psia	T_{O_2} , °R	$Re_\infty \times 10^{-6}$
$N_1E_2B_1F_1$	6.06	280	860	5.0
All	6.03	150	860	2.5
All	7.99	545	1310	2.5

SECTION IV RESULTS AND DISCUSSION

Selected data at Mach 6, zero roll, $Re_\infty/ft = 2.5 \times 10^6$ are presented in Fig. 4 to illustrate types of data obtained for various length models. As would be expected, the center of pressure moved forward on the model as the length was increased. Typical data for the basic configuration are presented in Fig. 5 to illustrate the effect of Mach number on the stability characteristics.

Figure 6 is a summary of the Mach 6 lateral stability data at various roll angles. Canting the fins 1 deg produced a significant change in the

rolling-moment data over the entire angle-of-attack range. However, it did not appreciably alter the side-force and yawing-moment data at the lower angles of attack.

The differential lateral stability characteristics are presented in Fig. 7. These coefficients were computed by subtracting the zero angle-of-attack data from the data obtained at various angles of attack. The canted fins had little effect on the incremental forces and moments produced by changing angle of attack.


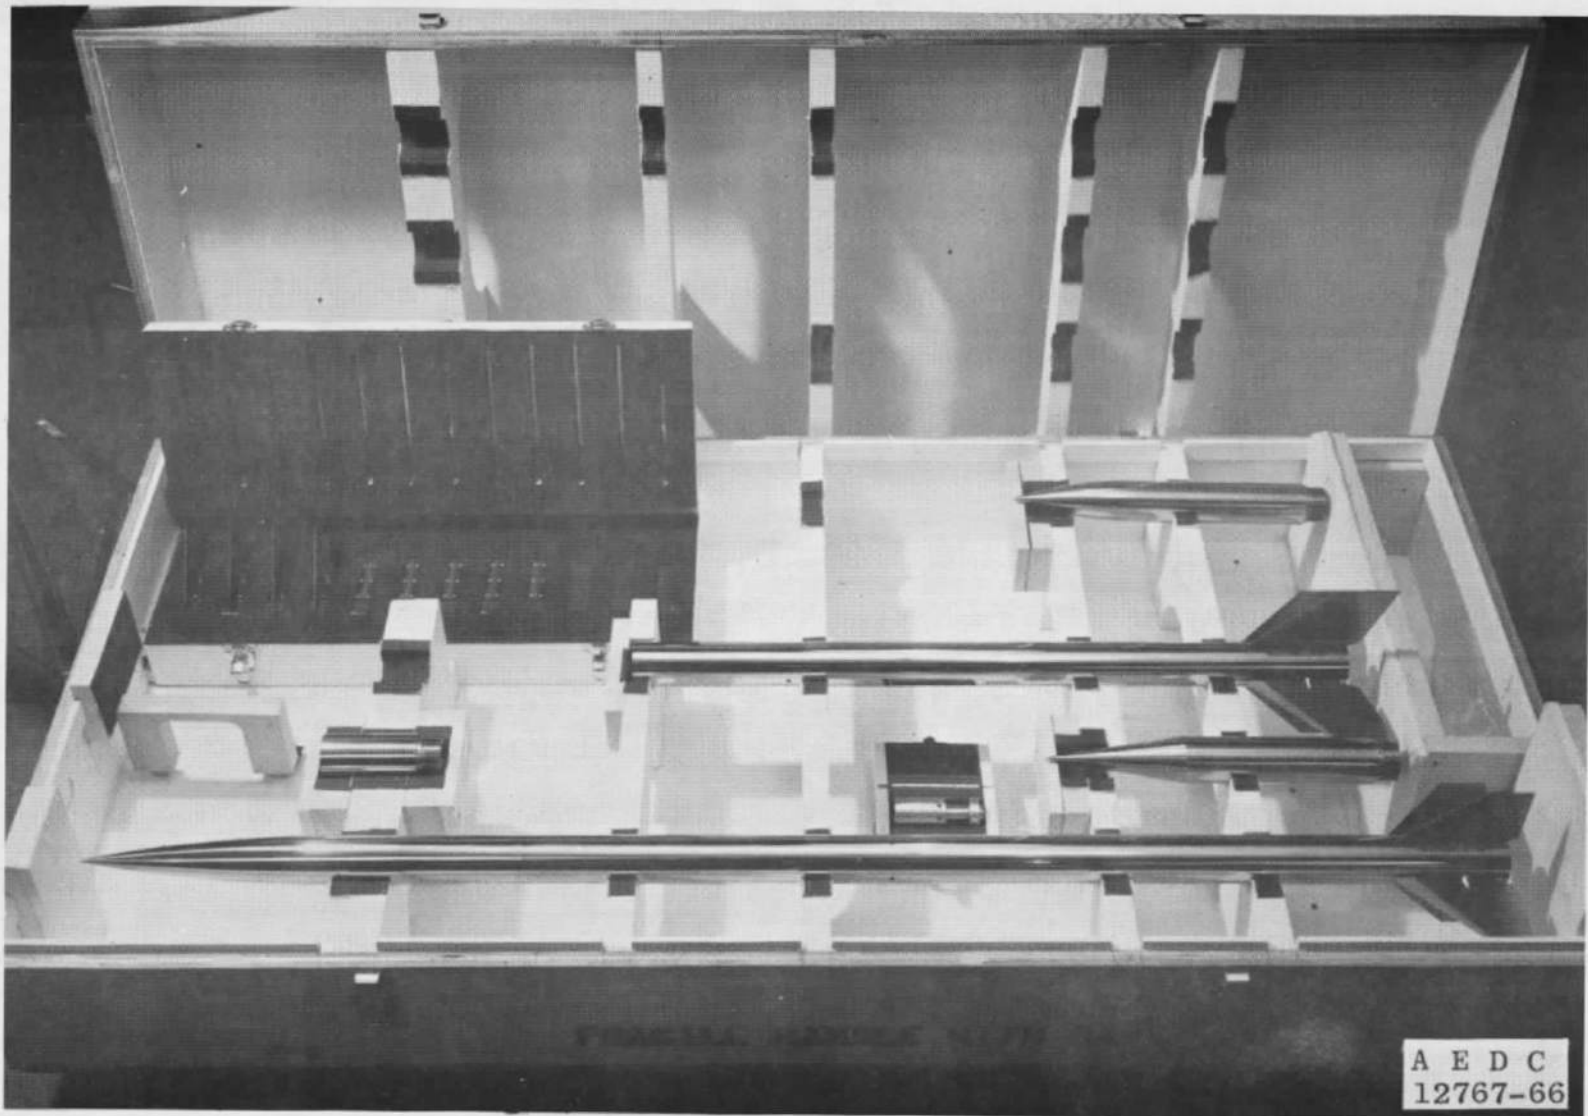


Fig. 1 Model Photograph

AEDC-TR-66-148

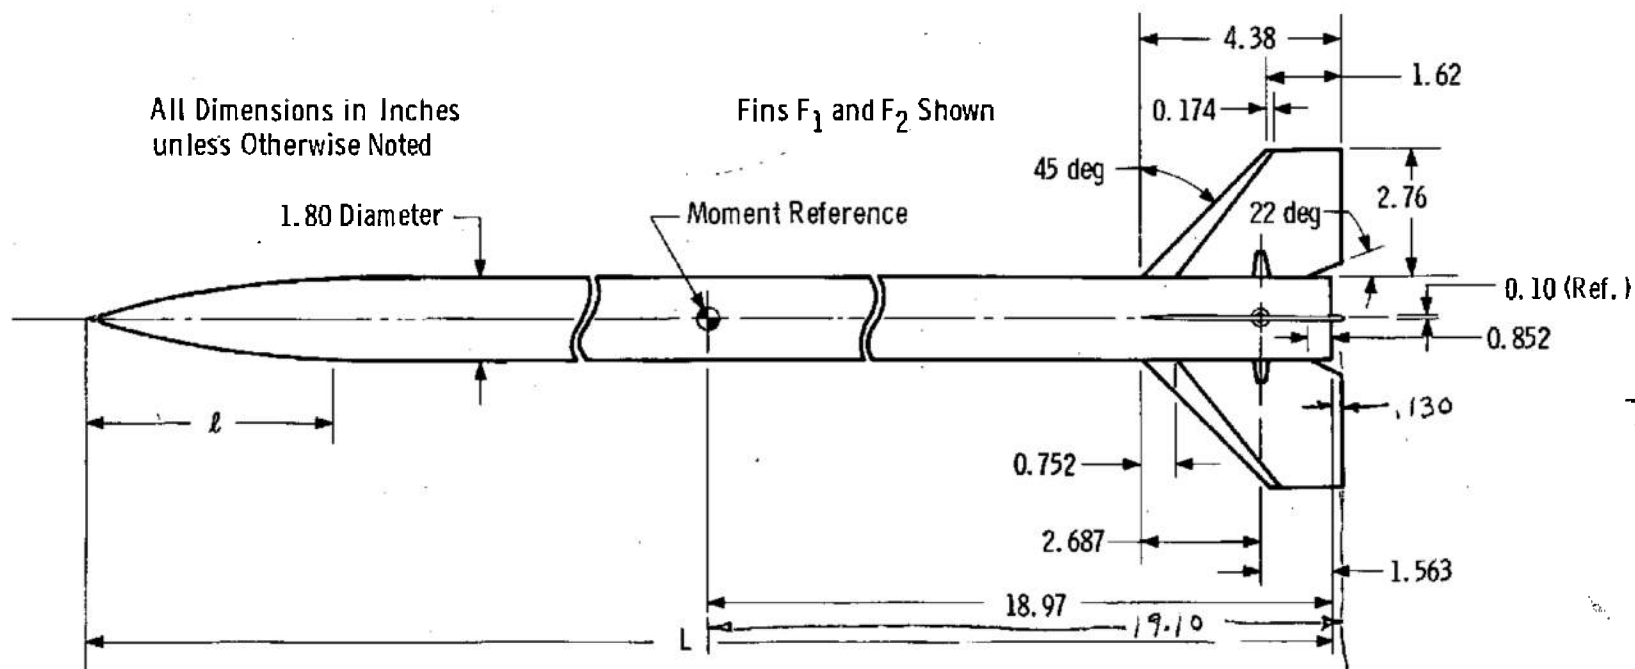

7.32 span

Nose	Type	ℓ
N_1	Ogive	5.4 ✓
N_2	Conical	5.4
N_3	Ogive	9.0

Extension	L
E_1	40.8 ✓
E_2	44.4
E_3	48.0

Fin	Type
F_1	0-deg Cant ✓
F_2	1-deg Positive Cant
F_3	0-deg Cant



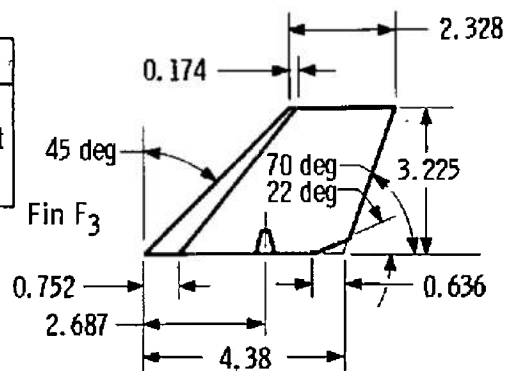


Fig. 2 Model Details

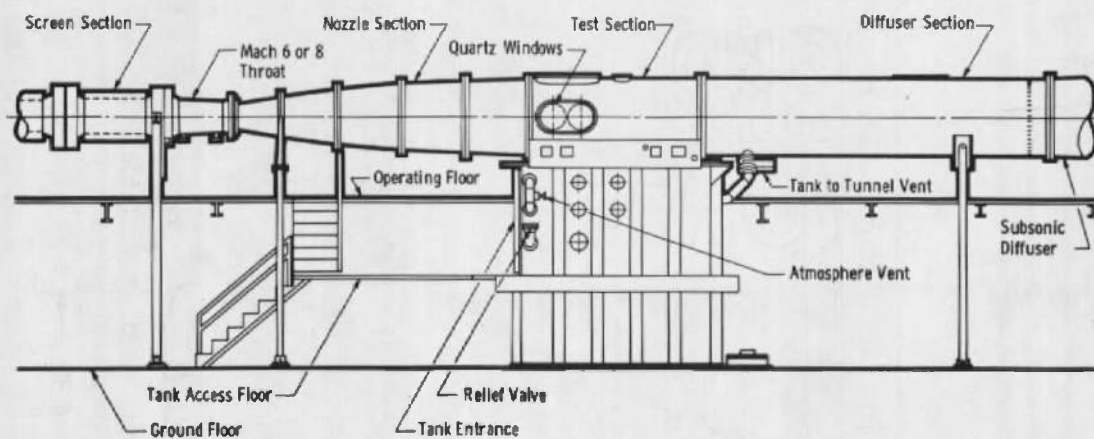

Tunnel Assembly

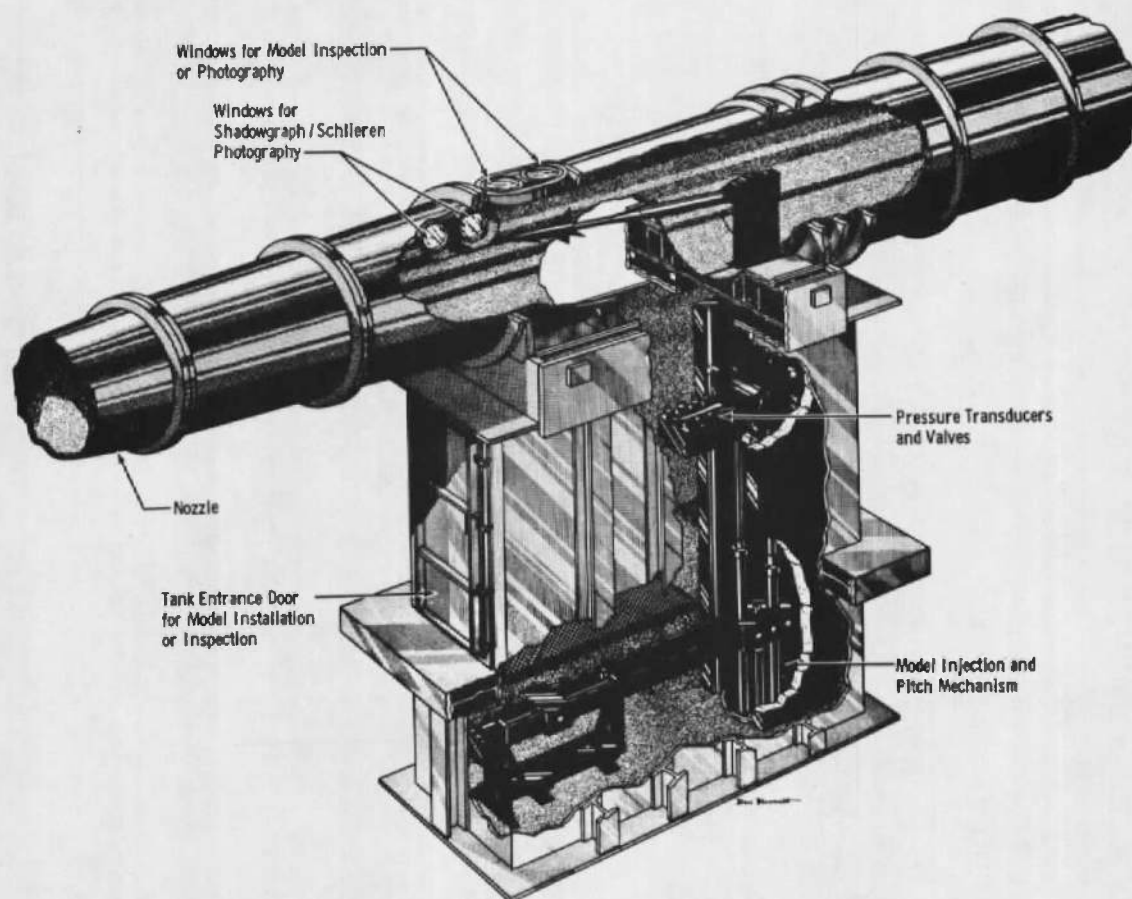

Tunnel Test Section

Fig. 3 Tunnel B

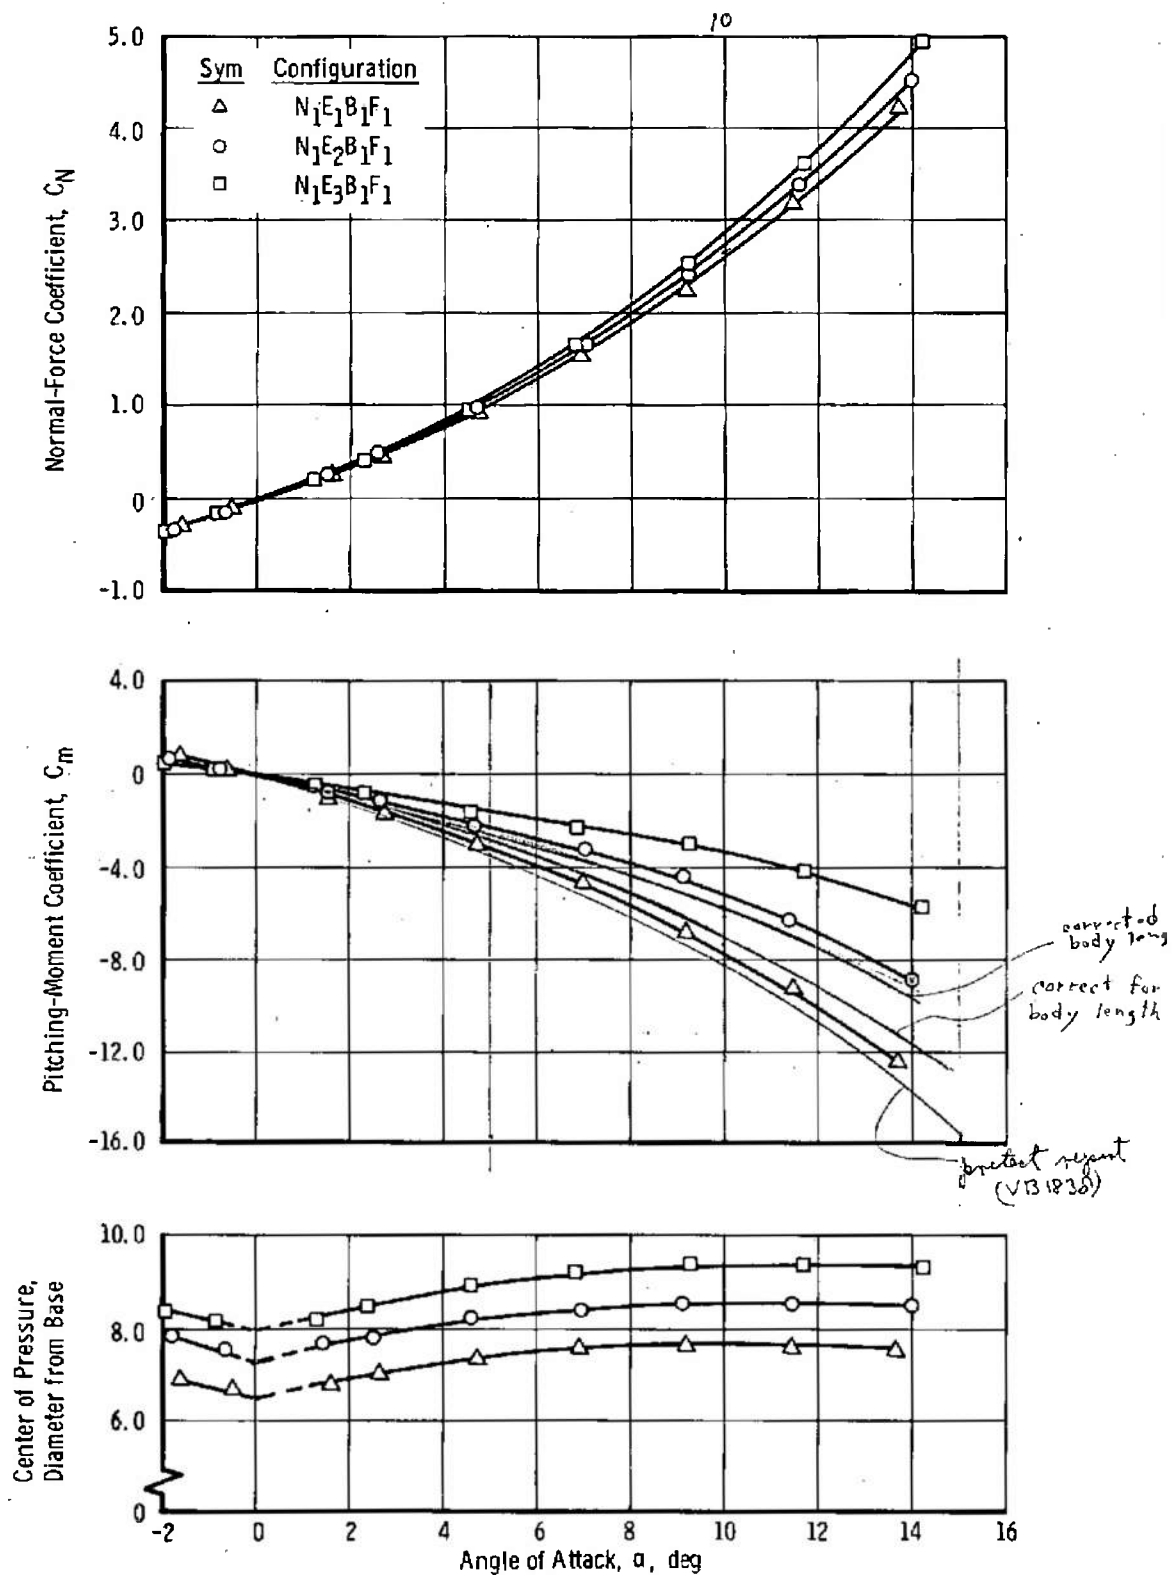


Fig. 4 Effect of Model Length on Longitudinal Stability Characteristics at Mach 6, Zero Roll, $Re_\infty/ft = 2.5 \times 10^6$

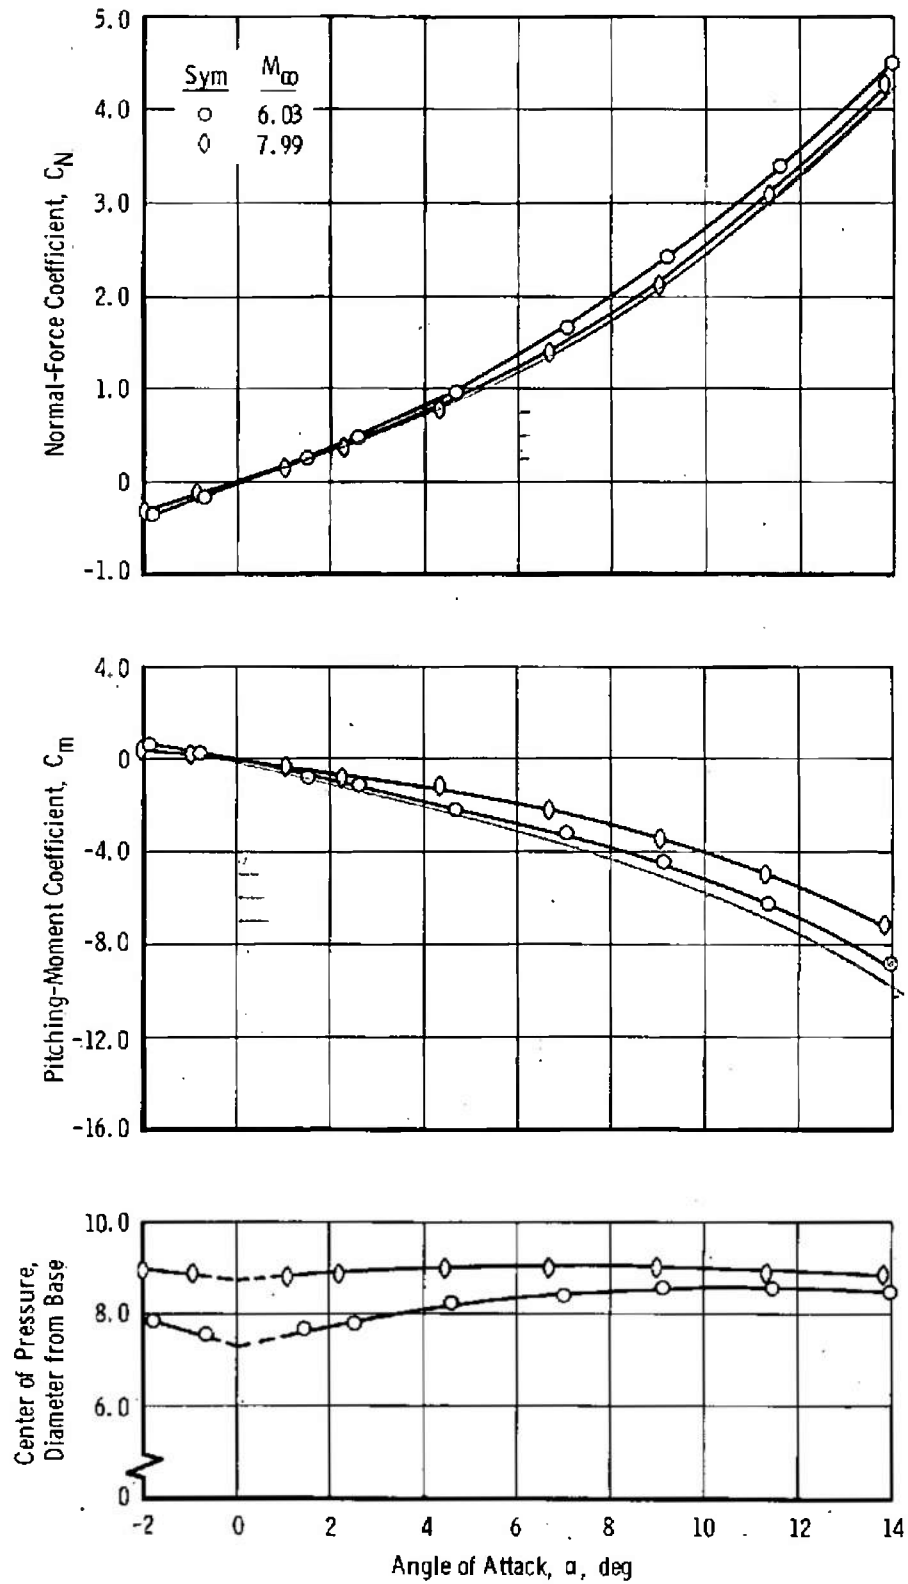


Fig. 5 Effect of Mach Number on Longitudinal Stability Characteristics of Configuration N₁E₂B₁F₁, Zero Roll, $Re_\infty/ft = 2.5 \times 10^6$

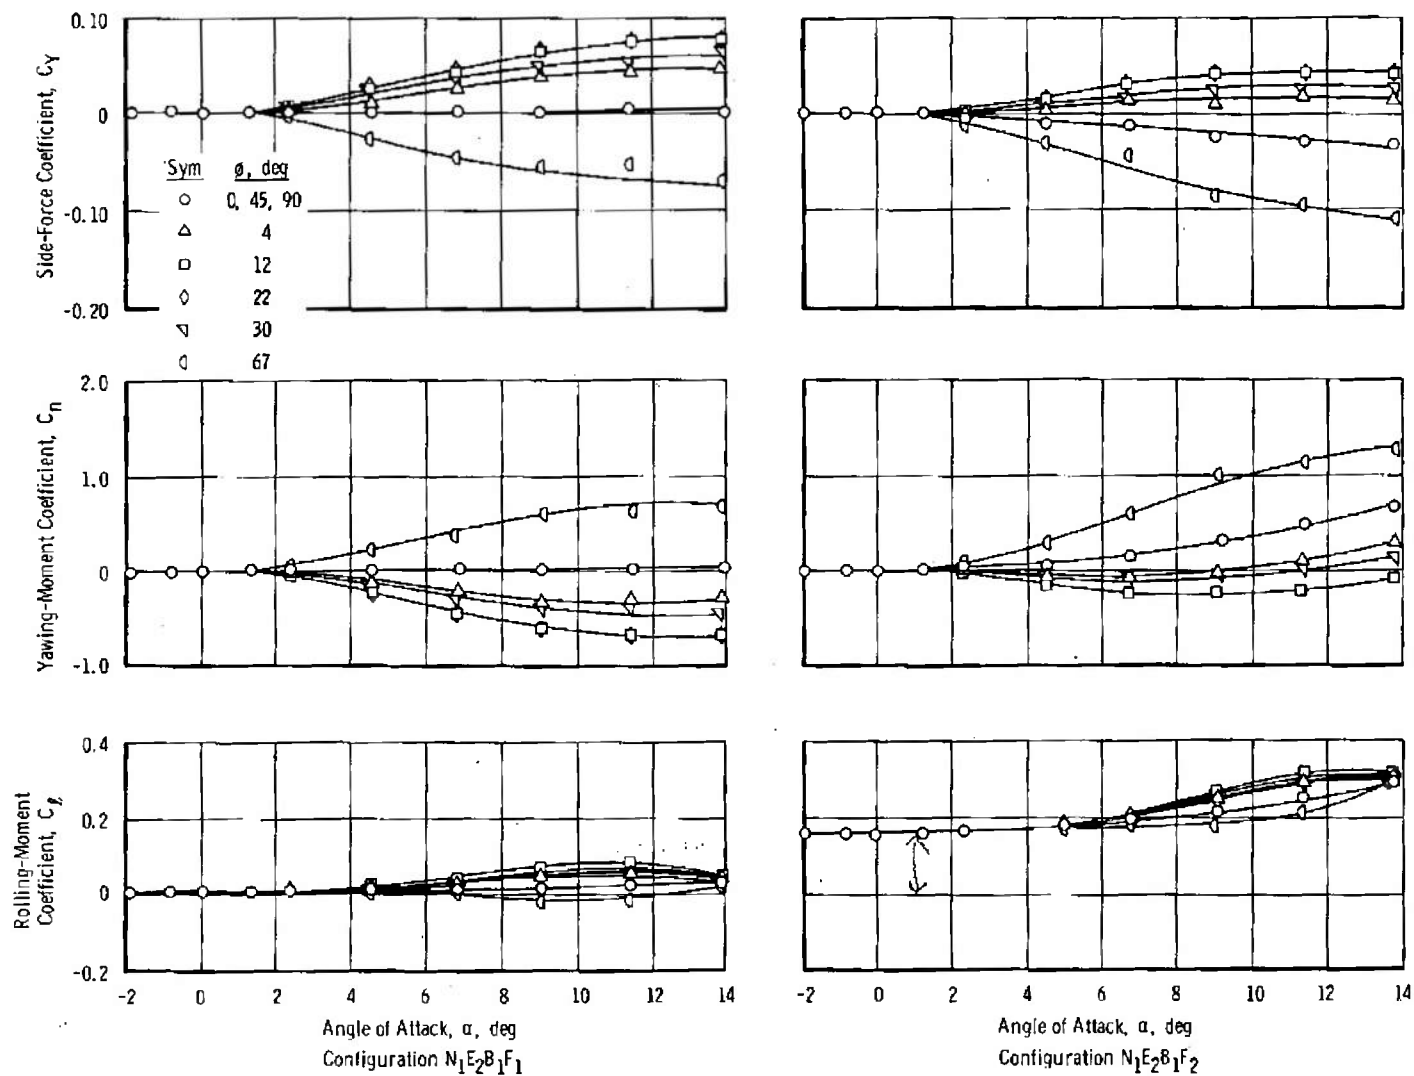


Fig. 6 Effect of Roll Angle on Lateral Stability Characteristics of Configurations $N_1E_2B_1F_1$ and $N_1E_2B_1F_2$ at Mach 6, $Re_\infty/ft = 2.5 \times 10^6$

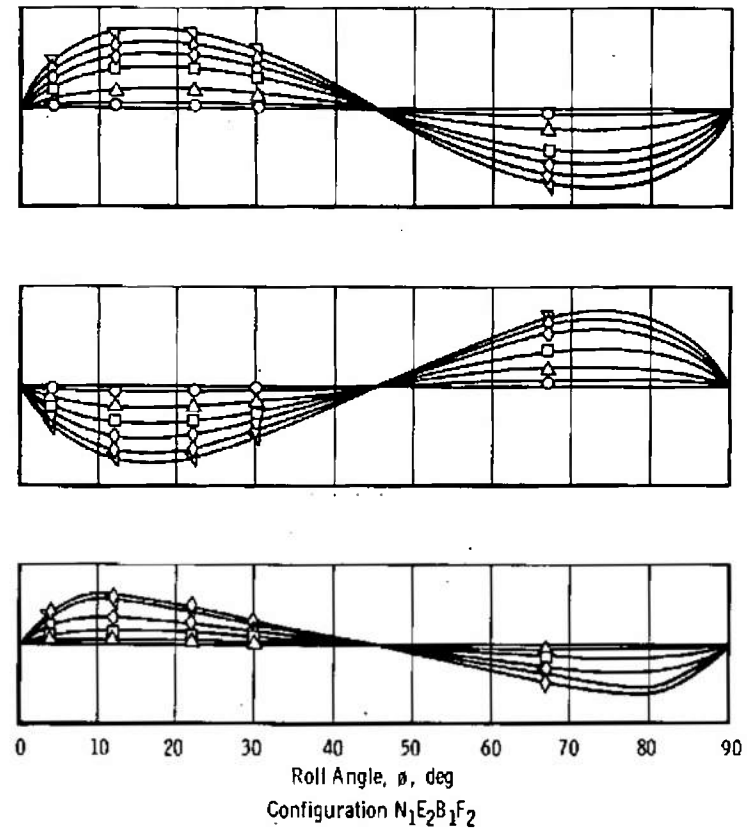
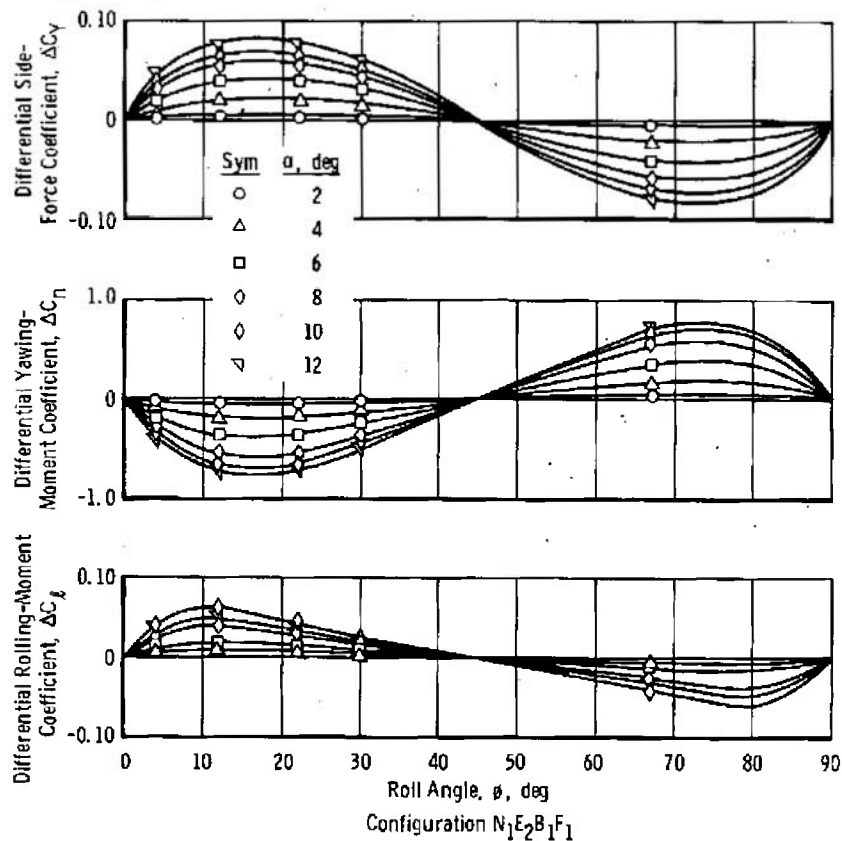


Fig. 7 Effect of Angle of Attack on Lateral Stability Characteristics of Configurations $N_1E_2B_1F_1$ and $N_1E_2B_1F_2$ at Mach-6, $Re_\infty/ft = 2.5 \times 10^6$

TABLE I
TEST SUMMARY

Configuration	M_∞	$Re_\infty \times 10^{-6}, \text{ft}^{-1}$	α, deg	ϕ, deg
$N_1E_2B_1F_1$	6.06	5.0	-2 to 14	0 and 12
"	6.03	2.5		0, 4, 12, 22, 30, 45, 67, 90
$N_1E_1B_1F_1$	<div style="display: flex; align-items: center;"> <div style="margin-right: 5px;">↓</div> <div style="text-align: center;">7.99</div> <div style="margin-left: 5px;">↓</div> </div>	<div style="display: flex; align-items: center;"> <div style="margin-right: 5px;">↓</div> <div style="text-align: center;">7.99</div> <div style="margin-left: 5px;">↓</div> </div>	<div style="display: flex; align-items: center;"> <div style="margin-right: 5px;">↓</div> <div style="text-align: center;">7.99</div> <div style="margin-left: 5px;">↓</div> </div>	0
$N_1E_3B_1F_1$				↓
$N_2E_2B_1F_1$				0, 4, 12, 22, 30, 45, 67, 90
$N_3E_2B_1F_1$				0
$N_1E_2B_1F_2$				↓
$N_1E_2B_1F_3$				0
$N_1E_2B_1$				↓
$N_1E_1B_1F_1$				0
$N_1E_2B_1F_1$				↓
$N_1E_3B_1F_1$				0
$N_2E_2B_1F_1$				↓
$N_3E_2B_1F_1$				0
$N_1E_2B_1$				↓

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Arnold Engineering Development Center ARO, Inc., Operating Contractor Arnold Air Force Station, Tennessee		2a. REPORT SECURITY CLASSIFICATION UNCLASSIFIED	
		2b. GROUP N/A	
3. REPORT TITLE HYPERSONIC STATIC STABILITY INVESTIGATION OF A TOMAHAWK 20-PERCENT-SCALE MODEL			
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) N/A			
5. AUTHOR(S) (Last name, first name, initial) Merz, Glenn H., ARO, Inc.			
6. REPORT DATE August 1966		7a. TOTAL NO. OF PAGES 18	7b. NO. OF REFS
8a. CONTRACT OR GRANT NO. AF40(600)-1200		9a. ORIGINATOR'S REPORT NUMBER(S) AEDC-TR-66-148	
b. System 921E			
c.		9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
d.		N/A	
10. AVAILABILITY/LIMITATION NOTICES Distribution of this document is unlimited and qualified users may obtain copies from DDC.			
11. SUPPLEMENTARY NOTES N/A		12. SPONSORING MILITARY ACTIVITY National Aeronautics and Space Administration (NASA) Goddard Space Flight Center Greenbelt, Maryland	
13. ABSTRACT An experimental investigation was conducted to obtain detailed static stability, induced roll and yaw, and roll forcing information on several configurations of a Tomahawk 20-percent-scale model. Tests were conducted at nominal Mach numbers of 6 and 8, free-stream Reynolds numbers of 2.5×10^6 and 5.0×10^6 per foot, angles of attack from -2 to 14 deg, and roll angles from 0 to 90 deg. Selected results are presented to illustrate types and quality of data obtained.			

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Tomahawk static stability hypersonic flow						

INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through _____."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through _____."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through _____."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.